


Refrigerated & Heating Bath Circulators (Programmable)

Newly developed bath circulator with the intelligent programmable controller brings the best intuitive control performance to your laboratory.



REMOTE CONTROL
with your **MOBILE DEVICE**
see page 8-9

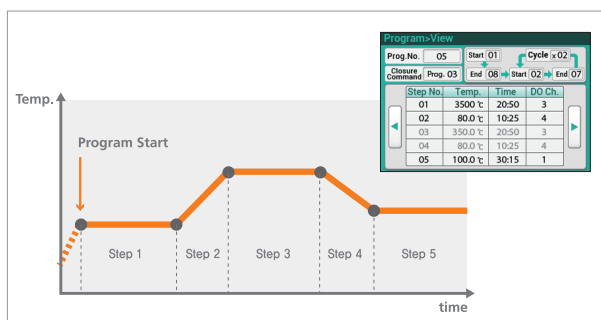

Intelligent program control

- 10 programs available for temperature ramp up and dwell control.
- 10 steps per a program and 99 hours 59 minutes per a step.
- Stored programs are easily linkable.
- Programs can be repeated up to 99 cycles.
- Pre-heating and heating time are settable before program starts.

RW3-0525P


Standard accessories

- Stainless steel flat cover
- Silicone rubber tubing (305mm length / 12mm inner dia.)


Optional accessories

see page 30-31

- Suction function for pumps
- Test tube racks, Spring wire racks, Gateway

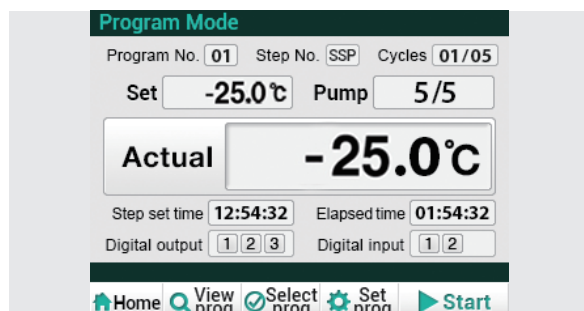

Touch LCD Controller

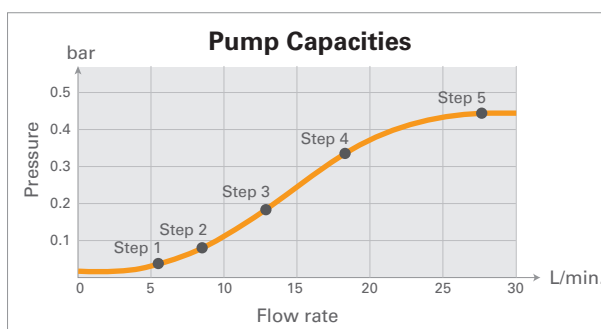

Pump Step	1	2	3	4	5
Max. pressure (psi)	0.5	1.1	2.4	4.9	5.9
Max. flow rate (L/min)	5.6	8.0	12.8	18.8	28.0

* Bath fluid: water at the normal temperature.



Performance

- Temperature range.
 - RW3-35P models from -35°C to 150°C.
 - RW3-25P models from -25°C to 150°C.
- Optimum refrigeration system by Microprocessor PID control. Energy efficient refrigeration operation is available within full range of temperature control.
- Three point temperature calibration / Automatic tuning / Automatic run.
- Suitable for both internal and external bath environments due to reduced turbulence by using five-speed adjustable pump and built-in cooling coil. (1 to 3 steps of the pump for internal circulation and 4 to 5 steps for external circulation)

Convenience

- Intuitive touch screen LCD controller with easy icons and logical menus.
- Dual wait on/off timer modes. (1 min. to 99 hr. 59 min.)
- Digital input and output control function for interlocking external devices.

- Built-in RS-232 port and USB port for external control and data collection.
- Corrosion-resistant, leak-proof, round-cornered, and easy-to-clean stainless steel bath with front access drain valve.
- Detachable condenser air-filter for easy maintenance of refrigerating efficiency.
- Usage of CFC-free refrigerant (R-507, R-404A) and a double service valve for leakage prevention.
- Quick-release front grill for easy cleaning of the condenser.
- Built-in casters and side handles for easy transport and installation.

Safety

- Isolated design of agitator, heater, and sensor by a baffle plate to minimize the turbulence in the bath fluid and also to protect users and samples against direct contact.
- Complete safety protection system with warning alarms.
 - Low fluid level and dry-running, over-temperature, over-current.
- Keypad lock function prevents accidental changes during operation.
- Splash-proof keypad.

for temperature range from -25°C to 150°C

Model	RW3-0525P	RW3-1025P	RW3-2025P	RW3-3025P	
Bath volume (L / cu ft)	5 / 0.2	10 / 0.4	20 / 0.7	30 / 1.1	
Working temperature range (°C / °F)	-25 to 150 / -13 to 302				
Temperature stability ¹⁾ (±°C / °F)	0.05 / 0.09				
Cooling capacity ²⁾ (bath fluid: ethanol)	at -20°C (-4°F), W	80	150	300	
	at 0°C (+32°F), W	230	270	420	
	at +20°C (+68°F), W	320	380	550	
	Refrigerator	1/3 LBP, R-507	1/3 LBP, R-507	1/2 LBP, R-404A	3/4 LBP, R-404A
Pump (bath fluid: water)	Max. pressure	5.9 PSI (406.8 millibar)			
	Max. flow rate	28 liters / minute (7.4 gallons / minute)			
Dimension	Bath opening / depth (WxL, D) (mm / inch)	150x99, 160 / 5.9x3.9, 6.3	211x154, 180 / 8.3x6.1, 7.1	290x214, 200 / 11.4x8.4, 7.9	300x264, 230 / 11.8x10.4, 9
	Exterior (WxLxH) (mm / inch)	308x480x733 / 12.1x18.9x28.9	366x532x780 / 14.4x20.9x30.7	386x602x825 / 15.2x23.7x32.5	446x662x895 / 17.6x26.1x35.2
	Net weight (kg / lbs)	38 / 83.8	44 / 97	60 / 132.2	67 / 147.7
	Electrical requirements (230V, 60Hz)	11A	11A	12.5A	13.5A
Cat. No.	AAH57641K	AAH57651K	AAH57661K	AAH57671K	
Electrical requirements (230V, 50Hz)	11A	11A	12.5A	13.5A	
Cat. No.	AAH57642K	AAH57652K	AAH57662K	AAH57672K	
Electrical requirements (120V, 60Hz)	12.6A	12.6A	-	-	
Cat. No.	AAH57643U	AAH57653U	-	-	

for temperature range from -35°C to 150°C

Model	RW3-0535P	RW3-1035P	RW3-2035P	RW3-3035P	
Bath volume (L / cu ft)	5 / 0.2	10 / 0.4	20 / 0.7	30 / 1.1	
Working temperature range (°C / °F)	-35 to 150 / -31 to 302				
Temperature stability ¹⁾ (±°C / °F)	0.05 / 0.09				
Cooling capacity ²⁾ (bath fluid: ethanol)	at -20°C (-4°F), W	80	150	400	
	at 0°C (+32°F), W	150	330	660	
	at +20°C (68°F), W	280	450	800	
	Refrigerator	1/2 LBP, R-404A	1/2 LBP, R-404A	3/4 LBP, R-404A	1 LBP, R-404A
Pump (bath fluid: water)	Max. pressure	5.9 PSI (406.8 millibar)			
	Max. flow rate	28 liters / minute (7.4 gallons / minute)			
Dimension	Bath opening / depth (WxL, D) (mm / inch)	150x99, 160 / 5.9x3.9, 6.3	211x154, 180 / 8.3x6.1, 7.1	290x214, 200 / 11.4x8.4, 7.9	300x264, 230 / 11.8x10.4, 9
	Exterior (WxLxH) (mm / inch)	308x480x733 / 12.1x18.9x28.9	366x532x780 / 14.4x20.9x30.7	386x602x825 / 15.2x23.7x32.5	446x662x895 / 17.6x26.1x35.2
	Net weight (kg / lbs)	38 / 83.8	44 / 97	60 / 132.2	67 / 147.7
	Electrical requirements (230V, 60Hz)	12.5A	12.5A	13.5A	14.5A
Cat. No.	AAH57741K	AAH57751K	AAH57761K	AAH57771K	
Electrical requirements (230V, 50Hz)	12.5A	12.5A	13.5A	14.5A	
Cat. No.	AAH57742K	AAH57752K	AAH57762K	AAH57772K	

1) Technical data according to DIN 12876. (bath fluid : ethanol at -10°C)

2) The cooling capacity is measured under 230V / 60Hz electrical condition.

* FDA establishment registered company. FDA listed products.