

Pharmaceutical Refrigerator

Stable cold storage for pharmaceuticals provided

Comprehensive Temperature Management.

- Temperature recording in real-time by thermal line recorder.
- Verified the temperature uniformity under KS P 6108 and DIN 13221 standard.
- Temperature deviation alarm function. (Temp. upper & lower)



Includes Thermal line recorder as standard to monitor a real-time temperature.

Licensed as a Medical Device.

- Licensed manufacturer for a medical device. (No. 3333 registered by KFDA)
- Certified by GMP.




PSR3-70

wire shelf 2ea, drawer 1ea, thermal line recorder, remote alarm system with battery (standard)

More Convenient Security System with Electronic Lock Function.

- The electronic lock system is provided as standard.
- An electronic lock drawer 1 set is provided as standard.
- Easy unlock on a touch display only for the authorized user.
- Convenient history check through recording the recent event such as door open or power on/off.

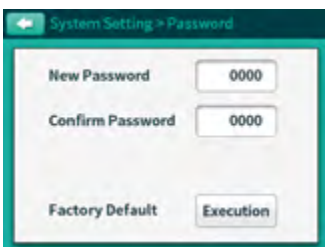

Digital door lock.

Safe Storage with the Temperature Deviation Alarm

- Built-in voice alarm system transmits voice messages to specified users (up to 7 phones) if there is an abnormality in the device.
- Monitor via mobile app anytime, anywhere with LC Connected (mobile monitoring system) connection. (when purchased LC GreenBox)




Mobile remote monitoring system.



Intuitive and convenient use with 3.5inch color touch display.




Convenient storage with a drawer.

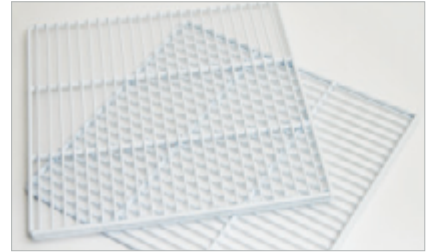

Wire shelf with good air permeability.

Dimensions

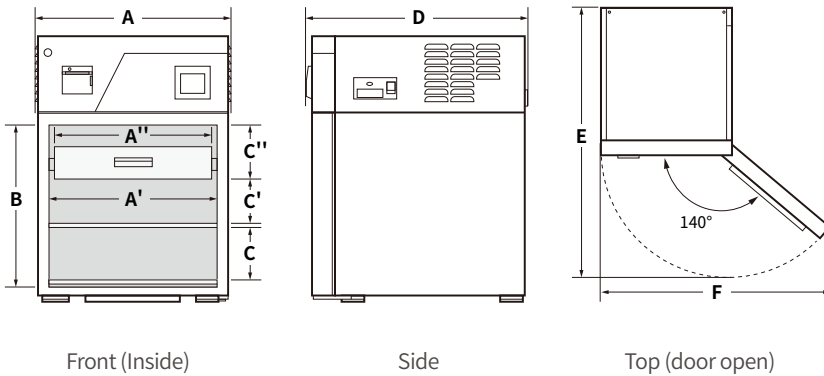

| Description | | Dimension (mm / inch) |
|-------------|--|-----------------------|
| A | External width | 522 / 20.6 |
| A' | Internal width | 390 / 15.4 |
| A'' | Drawer width | 349 / 13.7 |
| B | Internal height | 420 / 16.5 |
| C | Between the bottom shelf and the top shelf | 136 / 5.4 |
| C' | Between the top shelf and the drawer | 110 / 4.3 |
| C'' | Between the drawer and inner ceiling | 117 / 4.6 |
| D | External depth | 600 / 23.6 |
| E | Max. depth when door is opened | 1075 / 42.3 |
| F | Max. width when door is opened | 909 / 35.8 |

Specification

| Model | | PSR3-70 | |
|--|--------------------------------|--------------------------------------|------------------|
| Internal volume (L / cu ft) | | 73 / 2.6 | |
| Temperature | Range(°C / °F) (5°C set point) | 2 to 10 / 35.6 to 50 | |
| | Variation at 5°C (±°C) | 1.0 | |
| | Fluctuation at 5°C (±°C) | 2.0 | |
| Recorder | | 0 | |
| Digital door lock | | 0 | |
| Digital drawer lock | | 0 | |
| Quantity of wire shelf | | 2 | |
| Quantity of STS drawer | | 1 | |
| Remote alarm system | | 0 | |
| External dimension (W x D x H, mm / inch) | | 522 x 600 x 725 / 20.5 x 23.6 x 28.5 | |
| Electrical data (230V, 1P, A) | | 50Hz, 2.0 | 60Hz, 2.0 |
| Cat. No. | | AAHE6302K | AAHE6301K |
| Electrical data (120V, 60Hz, 1P, A) | | 4.0 | |
| Cat. No. | | AAHE6303U | |

Accessories Page 246 Shelf, Drawer, Recorder, Remote Alarm, Battery(Alarm), LC GreenBox