

Specifications and designs are subject to change without prior notice for continuous product improvement.

BRAND NEW POWERSONIC 600 Series

CE RoHS


The Most Powerful Bench-top Ultrasonic Cleaner

HSt
HWASHIN
TECHNOLOGY
COMPANY

POWERSONIC 605/620 (5liter/20liter)



Keypad for 605/610/620

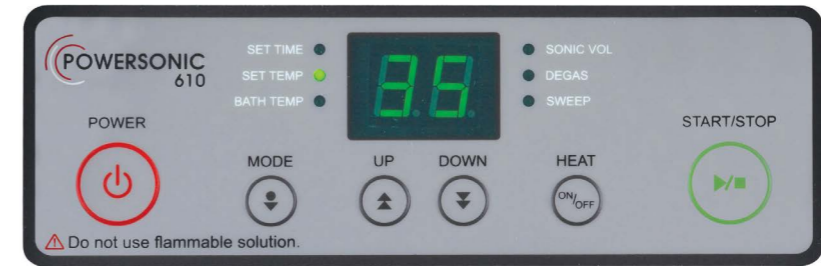

Features

- Built-in microprocessor controller
- High-performance industrial BLT Type transducer
- Selectable use of ultrasonic power (3 steps : Low-1, Medium-2, High-3)
- **Degassing function to eliminate dissolved gas in water or solutions**
- User-friendly control panel for easy and simple operation
- Elegant style and strong durability
- Lid to see the inside of the bath
- Built-in alarm function for operation stop
- Stainless steel tray (Optional)

Specifications

Model	POWERSONIC 603	POWERSONIC 605	POWERSONIC 610	POWERSONIC 620
Transducer	Industrial BLT Type			
Time Range	1~99 min (Digital)			
Temp. Range	Ambient~60°C (Digital)	Ambient~70°C (Digital)		
Frequency	40 KHz			
Housing Material	SUS 304 + ABS	SUS 304 + PP		
Bath Capacity	3.3 L	5.7 L	10.7 L	20.7 L
Bath Dimensions	W240 x D140 x H100mm	W300 x D155 x H150mm	W300 x D240 x H150mm	W500 x D300 x H150mm
Overall Dimensions	W325 x D225 x H255mm	W385 x D255 x H270mm	W385 x D345 x H270mm	W590 x D405 x H275mm
Tray Dimensions	W240 x D135 x H105mm	W240 x D120 x H100mm	W250 x D200 x H100mm	W440 x D250 x H100mm
Required Power	200 watt	350 watt	400 watt	700 watt
Net Weight	4.5 kg	6.1 kg	7.3 kg	11.8 kg
Voltage	Available from 100 to 240V, 50/60Hz			

New Features for 605/610/620

- Housing material of SUS 304 + PP(Polypropylene) for stronger durability
- Sweep function to optimize the cleaning power by modulating the frequency

- Drain knob on the right side of the unit for greater convenience.



Drain Knob for 605/610/620

